



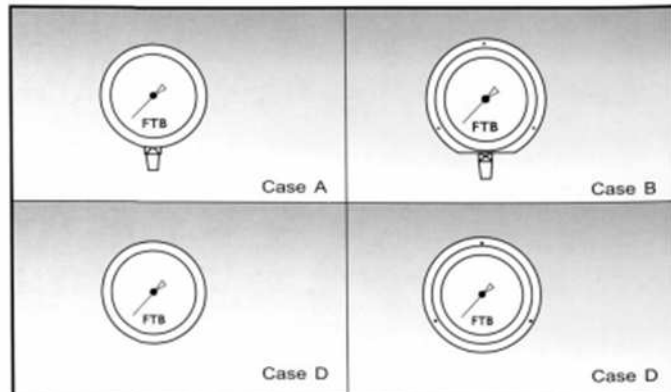

General Purpose Pressure Gauges

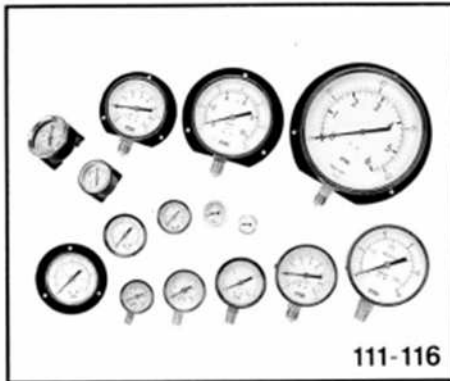

Model No.:111,112,113,114,115,116 SERIES

Outline:

FTB General Purpose Pressure Gauges are especially suitable for the pressure sources of water, oil, non-corrosive and pulseless media.

Features:

Model:111-116 series.

Type: Pressure gauges, vacuum gauges, compound gauges.

Nominal Size: 40 mm- 150 mm.

Case:Black steel case or selective ABS plastic with LM and CBM offered.

Lens:Glass or Acrylic.

Tubing: Brass or Phosphor Bronze.

Movement:Brass.

Connection:Brass, 1/8 " ,14 " 3/8 " ,1/2 " NPT,PT,PF.

Pointer:General.

Accuracy: $\pm 1.5-3\%$

Scale:psi, bar, kPa, MPa,g kg/cm², and etc.(single or dual scale)

www.viaindustrial.com



Specifications :

Nominal size (mm)			Connection	Model No.
40	A	—	NPT, PT, PF (1/8", 1/4")	111.11/171.11
	D	—		111.51/171.51
50	A	—	NPT, PT, PF (1/8", 1/4")	112.11/172.11
	D	—		112.51/172.51
60	A	—	NPT, PT, PF (1/4", 3/8")	113.11
	B	Back Flange		113.21
		—		113.51
	D	Front Flange		113.71
100	A	—	NPT, PT, PF (3/8", 1/2")	115.11
	B	Back Flange		115.21
150	B	Back Flange	NPT, PT, PF (3/8", 1/2")	116.21

Ranges (Kg/cm) ²	Socket	Tube	Accuracy (%F.S.)	Others
76 cmHg	Brass	Brass or Phosphor Bronze	± 3-2-3	<ul style="list-style-type: none"> Case & Ring Black Steel Case ABS Plastic Window Glass Acrylic (ASA LENS)
0-1				
0-2				
0-3				
0-4				
0-6				
0-11				
0-15				
0-20				
0-1				
0-2				
0-3				
0-4				
0-6				
0-10				
0-15				
0-20				
0-25				
0-35				
0-50				
0-70				
0-100				
0-150				
0-250				
0-350				

PRESSURE GAUGES---CASE TYPES

Case A (Lower Mount)



Case B (Lower Mount with Back Flange)



Case D (Back Mount with or without Front Flange)



www.viaindustrial.com