


# MVSC-460 series

SOLENOID VALVE

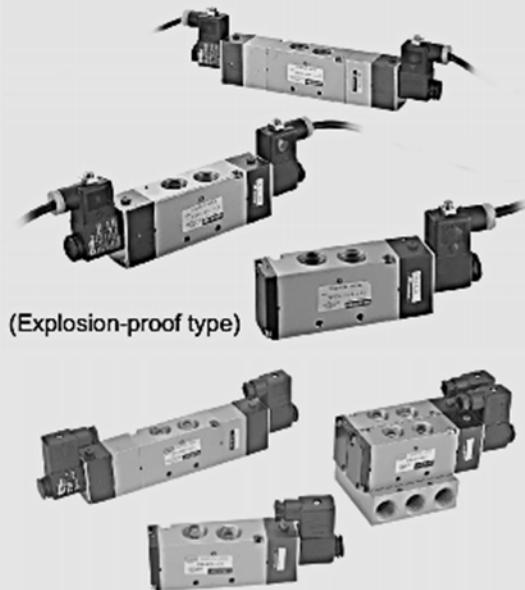


(Explosion-proof type)

### Specification:

Model	MVSC-460-3E1	MVSC-460-4E1,E2	MVSC-460-4E2C.P.R
Bore No.	15A		
Port size	G 1/2		
No. of port	3	5	
No. of position	2	2	3
Medium	Air		
Operating pressure range	2~7 kgf/cm <sup>2</sup>		3~7 kgf/cm <sup>2</sup>
Proof pressure	10.5 kgf/cm <sup>2</sup>		
Effective orifice	50 mm <sup>2</sup>		30 mm <sup>2</sup>
Response time	50 ms		
Ambient temperature	-5~+50°C (No freezing)		
Voltage	AC110V, 220V (50/60)Hz, DC24V		
Power consumption	AC=6/4.9VA DC=2.5W		
Available voltage range	±10%		
Insulation class	F class		
Weight	353 g	413 g	498 g 755 g

### Order example of valve:

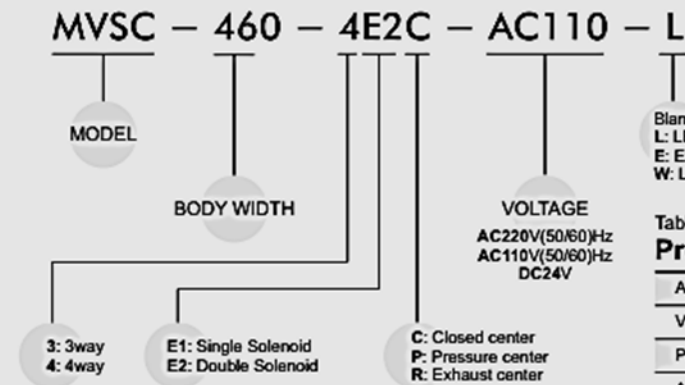


※ Port thread PT, NPT, are also available.

Blank: DIN connector  
L: LED indicator  
E: Explosion protection (Table 1)  
W: Lead wire

### Table 1 Property for explosion-proof type

Anti-explosion class	EEx m II T4
Voltage	AC110V, 220V, (50/60)Hz, DC24V.
Power consumption	AC=4.4VA DC=5W
Available voltage range	±10%
Insulation class	F class

### Order example of manifold:

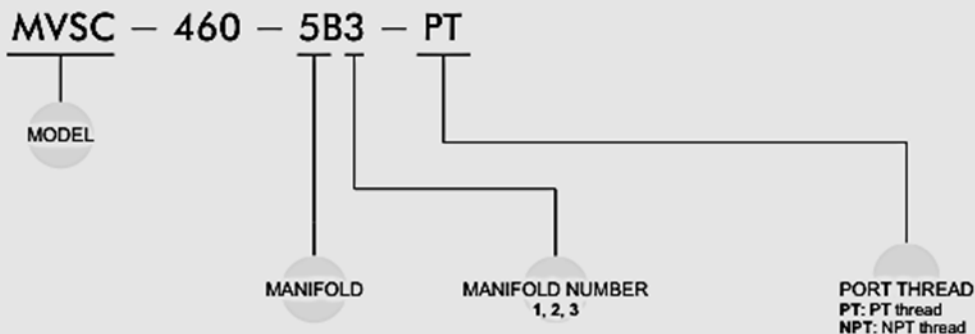


# MVSC-460

SOLENOID VALVE




## Dimensions:

### MVSC-460-4E1

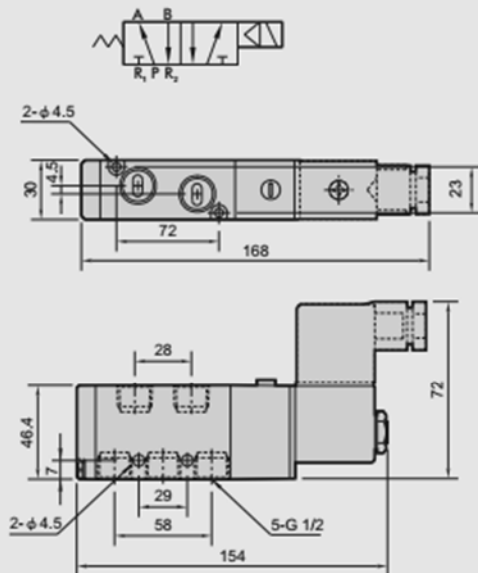


### MVSC-460-4E2

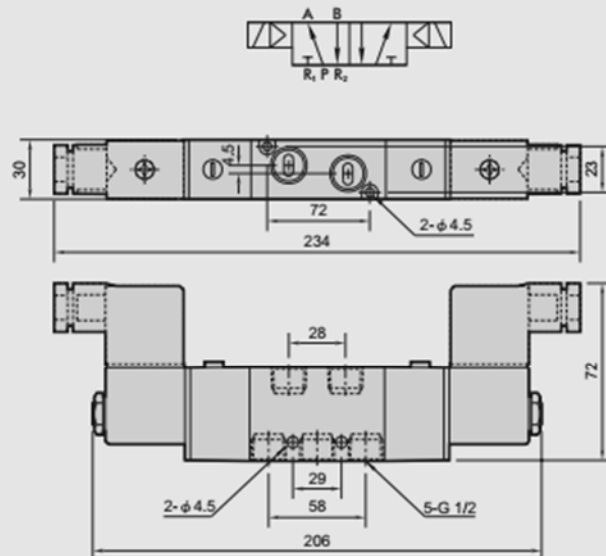


### MVSC-460-4E2C.P.R

MVSC-460-4E2C    MVSC-460-4E2P    MVSC-460-4E2R

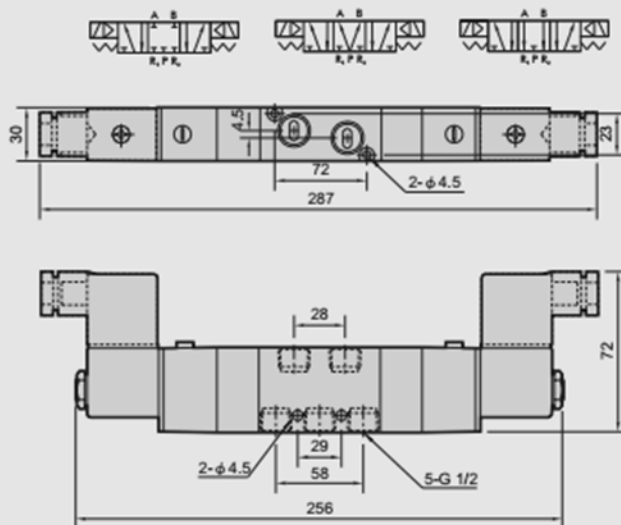

## Flow features:

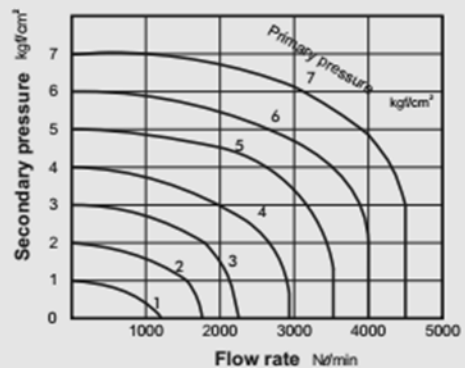


# MVSC-460

SOLENOID VALVE




## Dimensions:

### MVSC-460-3E1-NC/NO

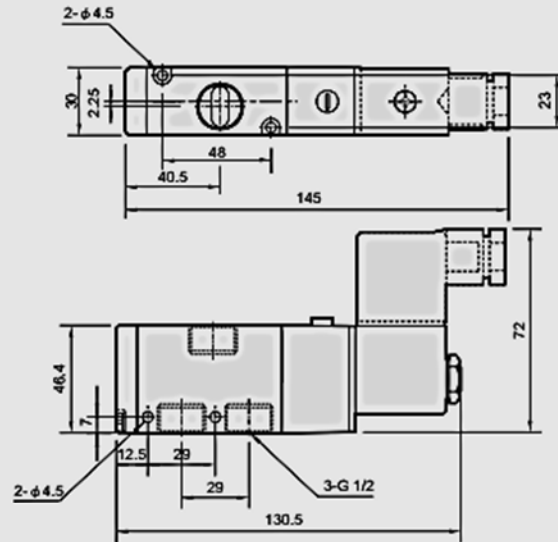

## Manifold of solenoid valve:

### MVSC-460-5B\*

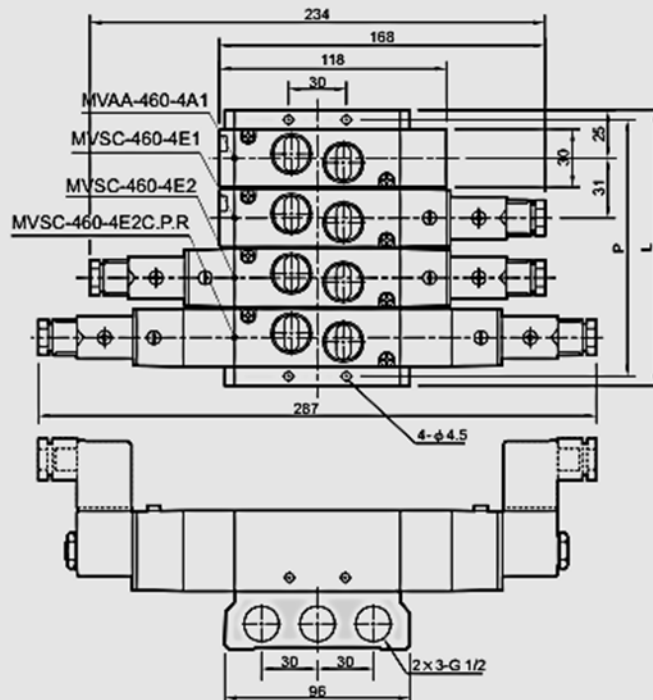

No. of stations	P	L
2	71	81
3	102	112
4	133	143
5	164	174
6	195	205
7	226	236
8	257	267
9	288	298
10	319	329