




## SUS Series



1. SUS series is multiplex-drive, piston guide,conductive normal close.
2. Valve body made of investment casting S/S 316.
3. Standard voltage: 110VAC / 220VAC / 24VDC
5. Other special AC/DC can be made to client`s order.
6. Screwed end: BSPT , NPT , BSP.
7. The standard product fluid temperature is 185°C(PTFE).
8. Applicable for working in high frequency movement location.
9. AC Voltage tolerance:  $\pm 10\%$  .  
DC Voltage tolerance:  $\pm 1\%$ .

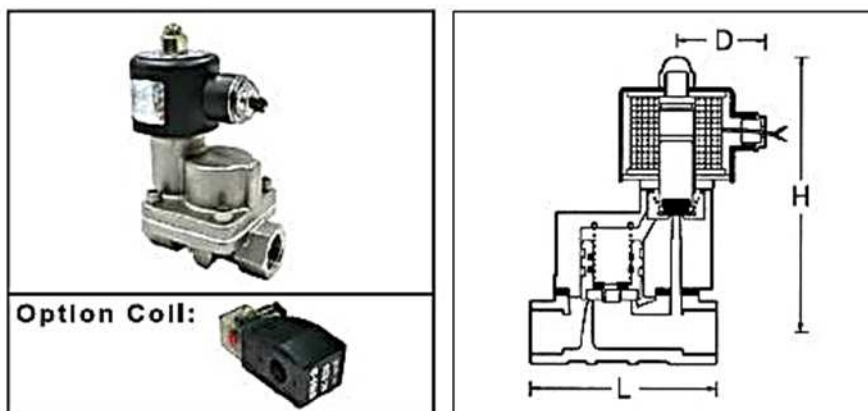


DIN	MODEL	PIPE SIZE	Cv	ORIFICE	FLUID TEMP. °C	MAX. OPERATING PRESSURE DIFF. KG/CM <sup>2</sup>				DIMENSION(mm)			WEIGHT (kg)
						WATER	AIR	STEAM	LIGHT OIL	L	H	D	
●	SUS-15#316	1/2"	4.0	17 mm	-5°C ~ 185°C	0.5-10	0.5-10	0.5-10	0.5-10	82	120	48	1.4
●	SUS-20#316	3/4"	6.0	17 mm	-5°C ~ 185°C	0.5-10	0.5-10	0.5-10	0.5-10	82	120	48	1.5
●	SUS-25#316	1"	12	22 mm	-5°C ~ 185°C	0.5-10	0.5-10	0.5-10	0.5-10	100	134	48	1.8
●	SUS-35#316	1 1/4"	18	30 mm	-5°C ~ 185°C	0.5-10	0.5-10	0.5-10	0.5-10	125	138	48	2.8
●	SUS-40#316	1 1/2"	22	30 mm	-5°C ~ 185°C	0.5-10	0.5-10	0.5-10	0.5-10	125	146	48	2.9
●	SUS-50#316	2"	48	50 mm	-5°C ~ 185°C	0.5-10	0.5-10	0.5-10	0.5-10	168	173	48	5.8

MATERAIL	
PARTS	MATERAIL
Body	CF8M
Coil	Special Copper Wire (H)
Core	Stainless Steel
Tube	Stainless Steel
Spring	Stainless Steel
Plug	PTFE
Bonne/Nut	PTFE
Piston	#316

SUS-15,20,25

Water

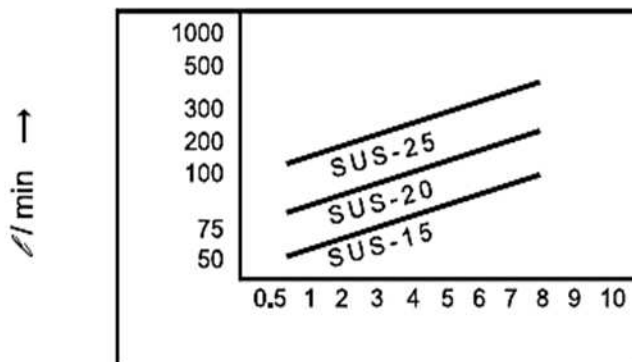

P<sub>2</sub> →

Steam / Air P<sub>2</sub> = Outlet Press KG/CM<sup>2</sup>

[www.viaindustrial.com](http://www.viaindustrial.com)