




SERIES : ITS

SPECIFICATION

TEST STANDERD	:	IS 2992 - 1987
ACCURACY	:	= 5 % OVER FIRST EFFECTIVE RANGE = 10 % OVER SECOND EFFECTIVE RANGE
VOLTAGE	:	= 10 % OF RATED VOLTAGE.
INSULATION RESISTENCE	:	BETTER THAN 50 MEGOHMS AT 500 VOLTAGE DC
DIE ELECTRIC TEST	:	WITHSTNDS 2 kV AC (rms).
SCALE LENGTH	:	70 mm (approx.)
WEIGHT	:	650 GRAMS (approx.)
DIEMENSIONS	:	145 x 110 x 70mm (approx.)
STANDARD ACCESSORIES	:	1. A PAIR OF TESTING LEADS 1 METER IN LENGTH ALONG WITH INSTRUMENT 2. INSTRUCTION BOOKLET 3. TEST CERTIFICATE
OPTIONAL ACCESSORIES	:	1. A REXINE CARRYING CASE WITH STRAP 2. A SET OF TEST LEADS 3 METER LONG.

ILLUSTRATION OF SCALE :

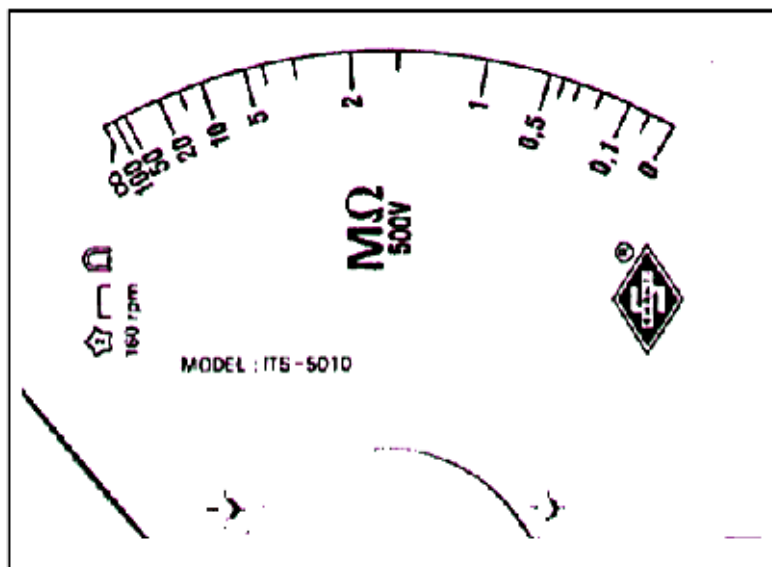

SELECT ANY RANGE FROM THE FOLLOWING :

RATED VOLTAGE	RATED RESISTANCE	MODEL NUMBER
500 V	100 M Ω	ITS-5010
1000 V	200 M Ω	ITS-10020

Contact Details :

